



LEGEND

- EXIST. WALL AND PARTITION TO REMAIN.
- EXISTING WINDOW
- EXIST. SMOKE & CARBON MONOXIDE DETECTOR
- EXIST. DROP CURTAIN

DEMOLITION PLAN


- EXISTING PLUMBING FIXTURE TO BE REPLACED
- EXISTING STOVETOP TO BE REPLACED
- EXISTING WINDOW MOLDING TO BE REPLACED
- EXISTING BATHTUB TO BE REMOVED

NOTE: PLUMBING WORK TYPE FILING UNDER LAA APPLICATION

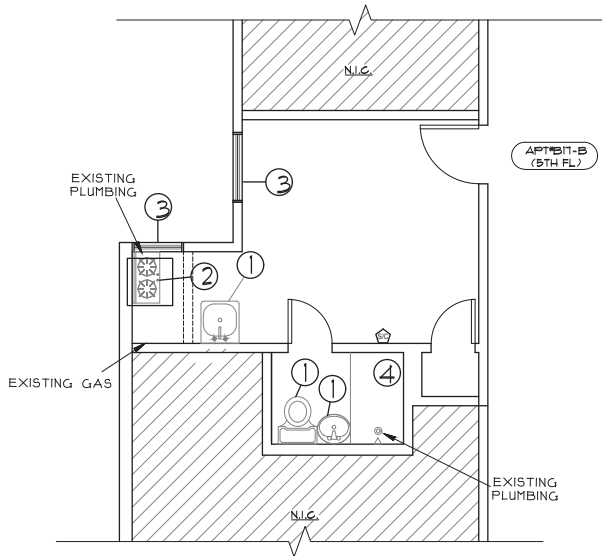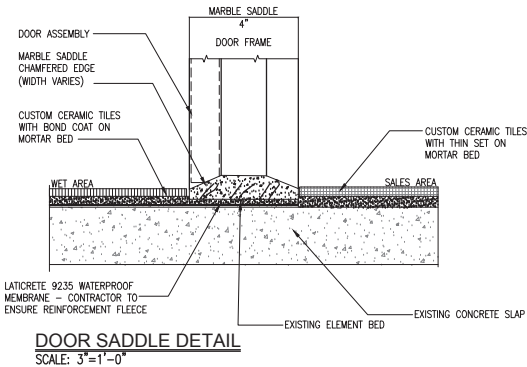

DEMOLITION PLAN (APT#B17-B)

SCALE: 1/4" = 1'-0"

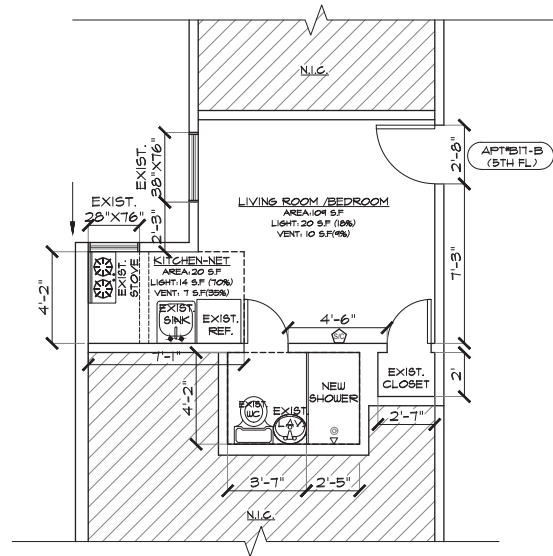

PROPOSED PARTIAL 5TH FLOOR PLAN (APT#B17-B)


SCALE: 1/4" = 1'-0"

LANDLORD INSTALLATION REQUIREMENT

- INSTALLATION OF GARBAGE DISPOSAL UNITS ARE NOT PERMITTED.
- FLOOR, EXTERIOR, DEMISING AND STRUCTURAL WALL AND CEILING SLABS SHALL NOT BE CHanneled, WOODEN BEAMS SHALL NOT BE NOTCHED AND CORED.
- ALL WOODEN FLOORS SHALL TO BE LOOSE-LAID.
- NO WALL/ BEARING WALL SHALL BE DEMOLISHED.
- NEW DOOR SHALL MATCH TO THE EXISTING.
- INSPECTION BY STONE ENGINEERING WILL BE REQUIRED FOLLOWING:
 - DEMOLITION.
 - COMPLETION OF PLUMBING WORK, I.E.: AFTER DOB PLUMBING INSPECTION HAS BEEN PERFORMED AND ALL WORK RESOLVED IN RELATION TO SAME AND BEFORE CLOSING OF THE WALLS.
 - UPON COMPLETION OF THE PROJECTSTONE WILL REQUIRE (5) FIVE WORKING DAY NOTICE FOR THESE INSPECTIONS. MANAGEMENT AND/OR ARCHITECT OF RECORD MUST ADVISE STONE OF THE PROJECT SCHEDULE AND ADVISE, WITH THE REQUIRED NOTICE, WHEN THE ABOVE MILESTONES WILL BE READY FOR INSPECTION. PLEASE CONFIRM.
- WATERPROOFING MEMBRANE SHALL BE INSTALLED ON THE FLOORS OF ALL WET AREAS, INCLUDING KITCHEN AND BATHROOM.
- WATERPROOFING MEMBRANE SHALL BE INSTALLED FULL HEIGHT IN SHOWER WALLS AND A MINIMUM 6" UP AT ALL OTHER WALLS.
- WATERPROOFING SHALL EXTEND THE FULL EXTENTS OF A BATHROOM FLOOR.
- PLEASE BE ADVISED THAT A SEAMLESS LEAD PAN IS REQUIRED TO BE INSTALLED IN A NEW SHOWER. THE IS TO BE MADE OF 6 LBS./SQ. FT. COMMON PIG LEAD WORKED INTO THE CORNERS (NOT CUT) AND EXTEND 6" MIN. UP THE WALLS AROUND AND UP OVER SHOWER CURB. IN THE EVENT THE SHOWER TO BE CONSTRUCTED REQUIRES HANDICAPPED ACCESSIBILITY OR IN THE ABSENCE OF A SHOWER CURB, SOME PROVISION MUST BE MADE IN THE EVENT THE SHOWER DRAIN BECOMES BLOCKED/CLOGGED AND ADVISE OF SAME
- LEAD PANS IN SHOWERS SHALL BE COATED IN LIQUID WATERPROOFING PRIOR TO INSTALLATION TO PROTECT IT FROM THE CORROSION WHILE BEING EXPOSED TO DAMP MORTAR.
- ALL LEAD PANS SHALL TO BE WATER TESTED. THE PAN MUST BE FILLED WITH WATER, THE LEVEL MARKED AND ALLOWED STAND FOR 12 HOURS. IF WATER HAS NOT DECLINED, THE PAN CAN BE INSTALLED.
- ALL WORK SHALL NOT DAMAGE OR MODIFY ANY OF THE EXISTING FIREPROOFING. ALL FIRE-STOPPING SHALL BE CODE COMPLIANT AND IS TO INCLUDE UL APPROVED DETAILS AND MATERIALS. THE WORK MUST NOT IMPACT OR LOWER THE REQUIRED FIRE RATINGS OF COLUMNS, BEAMS, CHASES, OR OTHER RATED ELEMENTS, AS WELL AS WALLS, FLOORS OR CEILINGS COMMON TO OTHER HABITABLE SPACES, PUBLIC SPACES OR TO THE EXTERIOR.
- ALL BRANCH LINES INCLUDING DOMESTIC HOT & COLD WATER PIPING, STEAM PIPING, RADIATOR PIPING & SHOWER/TUB DRAIN& WATER CLOSET WASTE CONNECTION ARE REQUIRED TO BE REPLACED WITH NEW PIPING BACK TO THE BUILDING RISERS WHEN EXPOSED DURING THE ALTERNATION OR IF FOUND TO BE DETERIORATED.
- A SHOT-OFF VALVE MUST BE INSTALLED AT EACH CONNECTION TO THE BUILDING'S LINE AND THE COLD AND HOT WATER PIPING MUST BE INSULATED, THIS INCLUDES EXISTING LINES TO REMAIN WHEN EXPOSED DURING THE WORK. THESE MUST BE FULLY ACCESSIBLE AND THE RESIDENT MANAGER SHOULD BE MADE AWARE OF LOCATION.


LANDLORD GENERAL NOTES:

- ANY AND ALL REQUIRED SPECIAL AND PROGRESS INSPECTIONS NOTED ON APPLICATIONS FILED WITH DOB MUST BE ADHERED TO.
- ALL WORK IS TO BE PERFORMED BY FULLY INSURED CONTRACTORS AND COPIES OF LICENSES AND INSURANCES FROM ALL LICENSED CONTRACTORS MUST BE SUBMITTED AS PART OF A COMPLETE REVIEW PACKAGE.
- PROPOSED PLANS SHALL COMPLY WITH ALL REQUIREMENTS OF ALL APPLICABLE BUILDING CODES, REGULATIONS AND ORDINANCES AS WELL AS ALL OTHER GOVERNING AGENCIES INCLUDING ADEQUATE ACCESSIBILITY AND USAGE BY THE DISABLED.
- THE UNIT OWNER IS TO BE MADE AWARE AND AGREES THAT SHOULD ANY APPLIANCE OR MECHANICAL EQUIPMENT INSTALLED CAUSE COMPLAINTS, BE IT: LEAKS, NOISE, VIBRATIONS, SUDS BACK UP INTO NEIGHBORING APARTMENT, THE BUILDING IS WITHIN THEIR RIGHTS TO REQUIRE THAT THE APPLIANCE OR EQUIPMENT BE REMOVED OR REMEDIATED AT THE UNIT OWNER'S SOLE EXPENSE.
- AN ASBESTOS CERTIFICATE MUST BE PROVIDED ALONG WITH COPIES OF AIR MONITORING REPORTS TO THE MANAGING AGENT BEFORE DEMOLITION. ANY ASBESTOS CONTAINING MATERIAL ("ACM") MUST BE HANDLED AND DISPOSED OF IN ACCORDANCE WITH LOCAL CODES, RULES AND REGULATIONS AND BE PERFORMED BY A FULLY LICENSED AND INSURED ASBESTOS ABATEMENT COMPANY. THE UNIT OWNER/TENANT COULD PROCEED WITH DEMOLITION IF THE APARTMENT DOES NOT CONTAIN ASBESTOS. DURING DEMOLITION IF POSSIBLE ACM IS FOUND IT SHALL NOT BE DISTURBED. TESTING IS REQUIRED AND ABATED IF POSITIVE.
- UNLESS TESTING PROVES OTHERWISE EXISTING PAINT IS TO BE ASSUMED TO CONTAIN LEAD AND AS SUCH HANDLED AND DISPOSED OF AS PER THE REQUIREMENTS OF THE EPA LAWS.
- ANY DAMAGE AS A RESULT OF THE PROPOSED WORK TO THE BUILDING AS A WHOLE OR NEIGHBORING APARTMENTS IS THE RESPONSIBILITY FINANCIALLY OR OTHERWISE OF THE UNIT OWNER. ANY VIOLATIONS OR FINES ISSUED TO THE BUILDING AS A RESULT OF THE PROPOSED WORK OR THE ASSOCIATED CONTRACTOR IS THE RESPONSIBILITY OF THE UNIT OWNER TO RESOLVE AND PAY. ANY REMEDIAL WORK REQUIRED TO CORRECT ANY OF THE AFOREMENTIONED DAMAGE OR VIOLATIONS IS ALSO THE RESPONSIBILITY OF THE UNIT OWNER.
- THE ADJOINING APARTMENTS SHOULD BE INSPECTED AND DOCUMENTED PRIOR TO ANY WORK TO DETERMINE THE CONDITION OF INTERIOR FINISHES AND FOR ANY EXISTING INTERIOR DEFECTS OR DAMAGES.
- DURING CONSTRUCTION, THE SELECTED CONTRACTOR SHOULD IMMEDIATELY NOTIFY ARCHITECT OF RECORD OF ANY STRUCTURAL CONDITIONS NOT IDENTIFIED ON THE APPROVED PLANS OR OF ANY STRUCTURAL CONDITIONS NOT IDENTIFIED ON THE APPROVED PLANS.
- THE ALTERATION SHALL NOT INTERFERE WITH THE BUILDINGS INTERCOM, GAS, ELECTRIC, HEATING, AIR-CONDITIONING, OR PLUMBING SYSTEM OR ANY OTHER BUILDING SYSTEM OR SERVICE.
- DEMOLITION SHALL BE CONDUCTED WITH HAND TOOLS ONLY. PNEUMATIC TOOLS AND ELECTRIC HAMMERS ARE NOT PERMITTED.

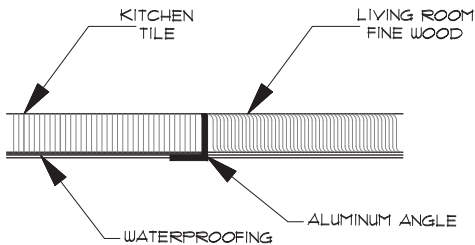

TYP. TILE DETAIL #2

SCALE: 1"=1'-0"

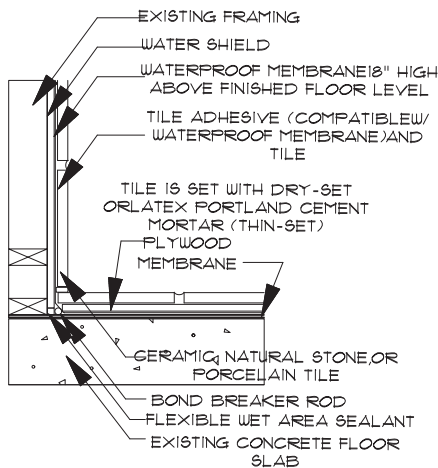


TYP. TILE DETAIL #1

SCALE: 1"=1'-0"

SECTION AT SHOWER FLOOR

NTS

NOTE:
The required waterproofing is Kemperol Ø22 with reinforcement fleece which must be installed throughout the application area, no other system is permitted.

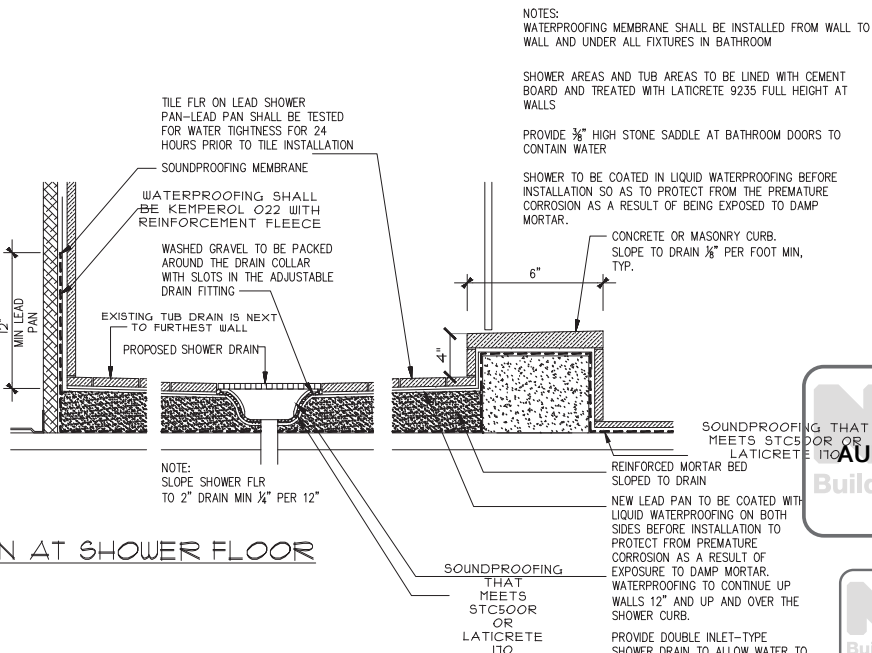

MANHATTAN BUILDINGS
AUDIT ACCEPTED

Manhattan Buildings
Professional Certification
ACCEPTED
Date: 04/23/2025

QWA
Studio

These drawings shall be used for the specific project location indicated within the Title Block, and shall not BE USED AT ANY OTHER LOCATION.

BIN	BLOCK	LOT
1011231	621	13

PROJECT :

96 PERRY ST.
APT#B17-B
NEW YORK NY 10014

DRAWN BY:

CHECKED BY:

DRAWING TITLE:

**NOTES,
FLOOR PLAN,
DEMOLITION PLAN**

SEAL & SIGNATURE:



DATE : 02/27/2025

SCALE : AS SHOWN

PROJECT No. :

DRAWING No.:

A- 001.00

SHEET No.: 2 OF 2

DOB JOB No.:

140941514